


AR10

Square ceiling luminaire, steel housing, aluminium optic or polycarbonate diffuser, recessed.




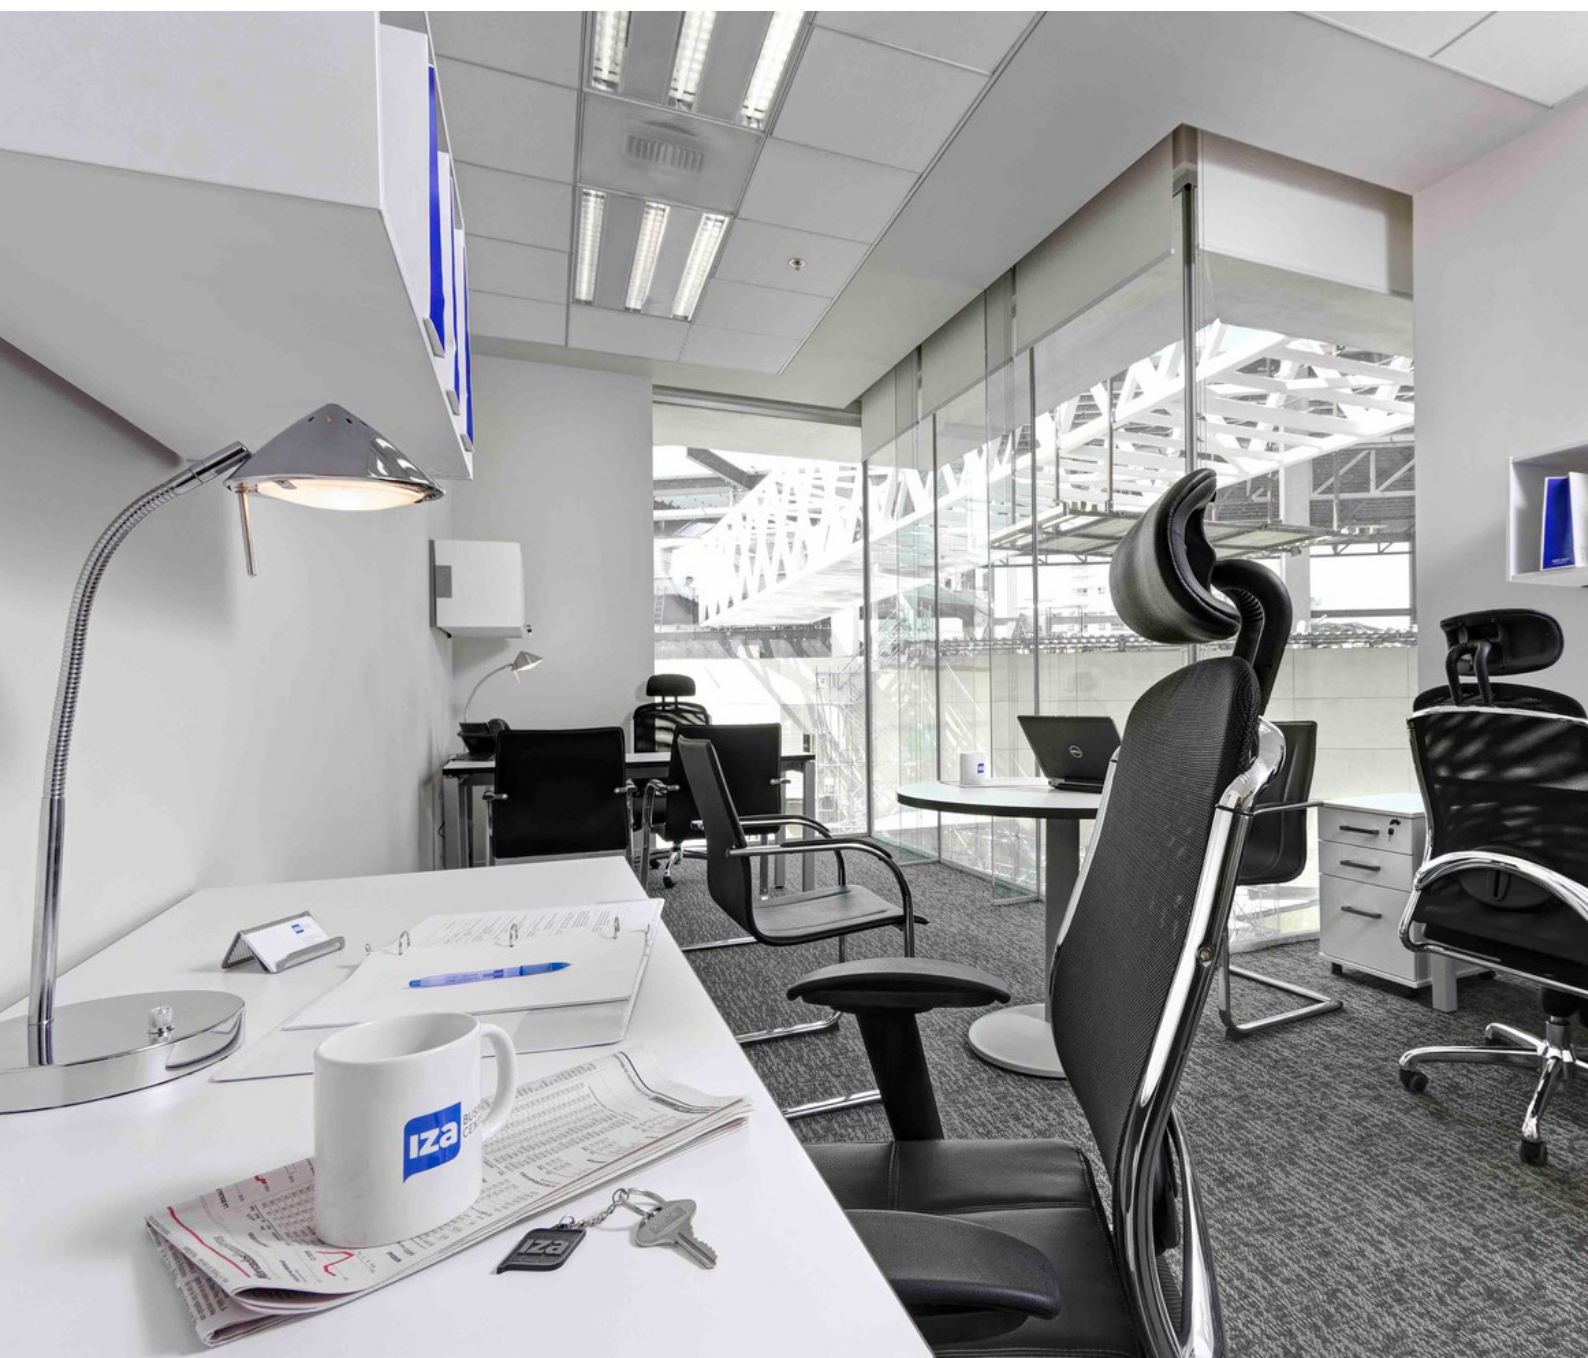

HOUSING	Steel
IP RATING	IP20/IP40
ELECTRICAL SPECIFICATION	220 - 240V/ 50-60 Hz
POWER CONSUMPTION	31W/41W
COLOR	White (Other RAL color available on request)
OPERATING TEMPERATURE	-10°C ~ +40°C
ACCESSORIES	

BEAM ANGLE	87°
LIGHT SOURCE	SMD
COLOUR TEMPERATURE	3000K/4000K/6000K (Other color temperature available on request)
LUMINOUS FLUX	2900lm, 3800lm
COLOR RENDERING INDEX	Ra≥80
OPTIC	Aluminium Louvre / Opal
OPTION	1 Dimmable LED driver 1-10V (DIM) 2 Dimmable DALI LED driver (DALI) 3 Emergency backup kit 90 min (EM 1.5) 4 Emergency backup kit 3Hrs (EM3)

DIMENSIONS

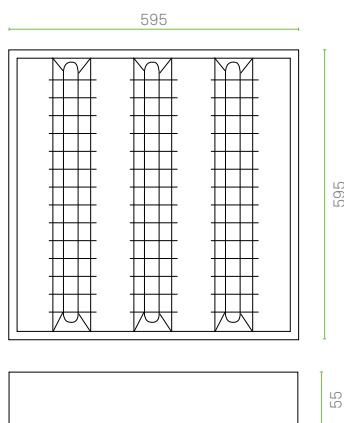


TECHNICAL SUMMARY

Code	IP	Power	Optic	Luminous Flux
AR10-a	20/40	31W	Louvre / Opal	2900lm
AR10-b	20/40	41w	Louvre / Opal	3800lm


ORDERING INFORMATION	Code	Wattage	Beam Angle	Colour Temp	Optic	Dimmable	Emergency Kit	Accessories
	AR10-a	31W	Select	Select	Select	Option	Option	Select if applicable

PHOTOMETRIC

Louvre



Opal





● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT:

Lucio-International B.V.
The Netherlands

info@lucio-international.com
www.lucio-international.com