

UW1

Underwater luminaire, stainless steel, symmetric and asymmetric, single color and RGB, recessed mounted






UW-a



UW-b

HOUSING	Stainless steel
IP RATING	IP68
ELECTRICAL SPECIFICATION	220 - 240V/ 50-60 Hz
POWER CONSUMPTION	3W
COLOR	White, Grey, Black (Other RAL color available on request)
OPERATING TEMPERATURE	-20°C- +50°C

DIMENSIONS

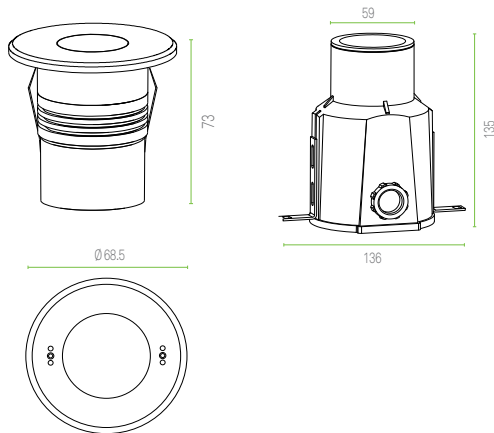

BEAM ANGELS	30°/ 35°/45°
LIGHT SOURCE	COB
COLOUR TEMPERATURE	2700K (Other color temperature available on request)
LUMINOUS FLUX	
COLOR RENDERING INDEX	Ra≥80
OPTIC	Tempered glass

TECHNICAL SUMMARY

Code	Power	Ø	H
UW1-a	3W	68.5	73
UW1-b	3W	68.5	73

ORDERING INFORMATION	Code	Wattage	Beam Angle	Colour Temp	Dimmable	Emergency Kit	Color	Accessories
	UW1-a	3W	Select	Select	Option	Option	Select if applicable	Select if applicable

PHOTOMETRIC



● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT:

Lucio-International B.V.
The Netherlands

info@lucio-international.com
www.lucio-international.com