

FL4

Floodlight, round, aluminium housing, black, grey or RAL color, 4 different beam angles, single color or RGB.






HOUSING	Die-cast aluminum
IP RATING	IP65
ELECTRICAL SPECIFICATION	220 - 240V/ 50-60 Hz
POWER CONSUMPTION	29.8W / S 28.2W/ RGB
COLOR	Black
OPERATING TEMPERATURE	-40°C~ +50°C
ACCESSORIES	

BEAM ANGLE	75°/100°/120°
LIGHT SOURCE	SMD
COLOUR TEMPERATURE	3000K/4000K/5000K (Other color temperature available on request)
LUMINOUS FLUX	See Technical summary
COLOR RENDERING INDEX	Ra≥80
OPTIC	Tempered protection glass
OPTION	1 Dimmable LED driver 1-10V (DIM) 2 Dimmable DALI LED driver (DALI)

DIMENSIONS

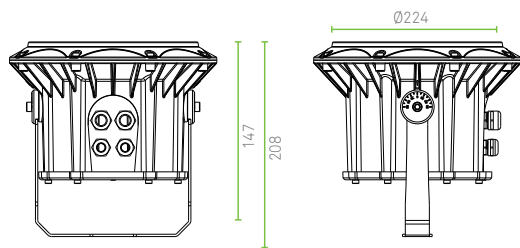


TECHNICAL SUMMARY

Code	Power	Luminous Flux	LED qty.	Ø	H
FL4-a	29.8W / S	1951lm	24pcs	224	208
FL4-b	28.2W / RGB	1057lm	24pcs	224	208

ORDERING INFORMATION	Code	Wattage	Beam Angle	Colour Temp	Dimmable	Emergency Kit	Color	Accessories
	FL4-a	29.8W	Select	Select	Option	Option	Select if applicable	Select if applicable

PHOTOMETRIC

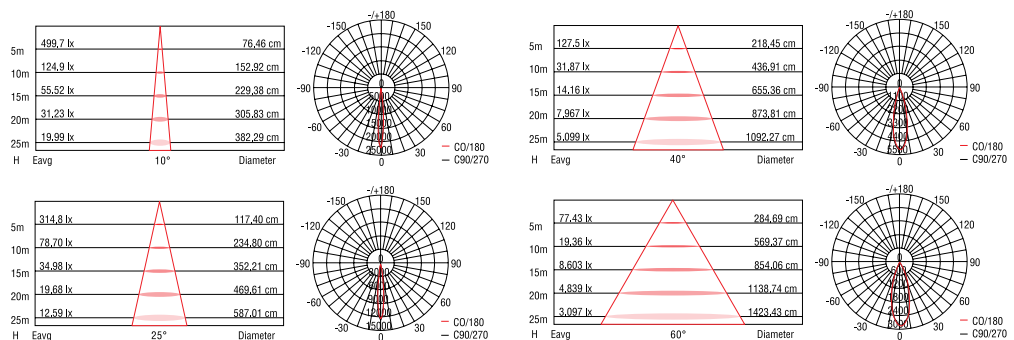



● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT:

Lucio-International B.V.
The Netherlands

info@lucio-international.com
www.lucio-international.com