

AR8


Suspended luminaire, steel housing, white, grey or RAL color, aluminium optic






HOUSING	Steel	BEAM ANGLE	138.4°
IP RATING	IP20	LIGHT SOURCE	SMD
ELECTRICAL SPECIFICATION	220 - 240V/ 50-60 Hz	COLOUR TEMPERATURE	3000K/4000K/6000K (Other color temperature available on request)
POWER CONSUMPTION	39W	LUMINOUS FLUX	3900lm
COLOR	Rim: White/Grey/Black (Other RAL color available on request)	COLOR RENDERING INDEX	Ra≥80
OPERATING TEMPERATURE	-20°C ~ +40°C	OPTIC	Aluminum
ACCESSORIES	Suspension Kit (SK)	OPTION	1 Dimmable LED driver 1-10V (DIM) 2 Dimmable DALI LED driver (DALI) 3 Emergency backup kit 90 min (EM 1.5) 4 Emergency backup kit 3Hrs (EM3)

DIMENSIONS

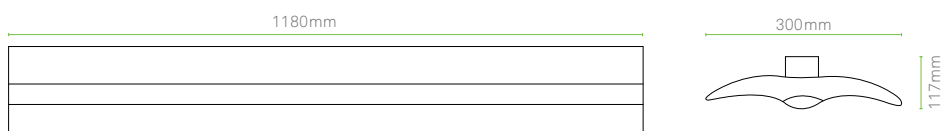

ORDERING INFORMATION	Code	Wattage	Beam Angle	Colour Temp	Dimmable	Emergency Kit	Color	Accessories
	AR8	39W	Select	Select	Option	Option	Select if applicable	Select if applicable

PHOTOMETRIC





● THINK LIGHT

FOR MORE INFORMATION PLEASE CONTACT:

Lucio-International B.V.
The Netherlands

info@lucio-international.com
www.lucio-international.com